

INSTALLATION INSTRUCTIONS

DESCRIPTION: Switch Panel Kit

PART NUMBER: 2HC-H2570-V0

MODEL: '16 ~ YXZ1000R



⚠ WARNING

Please read and understand these instructions completely before installation to avoid possible injury, or damage to the accessory or vehicle.

NOTICES:

This installation should be performed by an authorized Yamaha dealer or other qualified technician.

WARRANTY INFORMATION:

Genuine Yamaha Accessories are covered by a one-year limited warranty against defects in material or workmanship. Labor for replacement of defective components is not covered. See your Yamaha dealer for a copy of the warranty statement.

DEALER OR INSTALLER:

These instructions contain important information for future reference and *must* be given to the customer.

COMPONENTS NOT INCLUDED IN THIS KIT:

Audio System p/n 2HC-H81C0-V0, Rear speaker pods p/n 2HC-H81D0-V0, Powered Subwoofer p/n 2HC-H81D0-T0, Light Bar Kits p/n 2HC-H4104-xx (various), Accessory Light Kit p/n 2HC-H4104-V0

No.	Part Number	Description	Qty
--	2HC-H2570-V0	Switch Panel Kit	--
①	*	Switch Panel	1
②	*	12V receptacle	1
③	*	Plug Cap	1
④	*	Radio Hole Cap	1
⑤	*	SS Phillips Head Screw	4
⑥	*	Cover Switch	4
⑦	*	Wire Harness	1
⑧	*	Grommet	1

* Part supplied with kit only and not available separately.

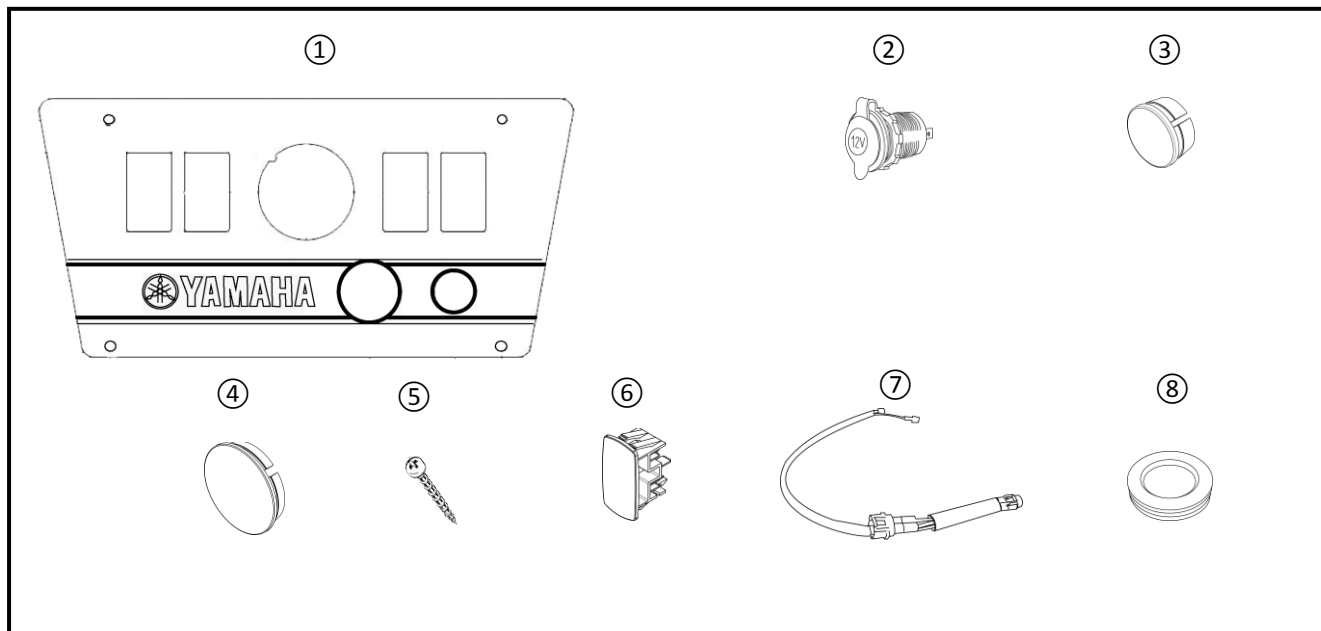


Fig. 1


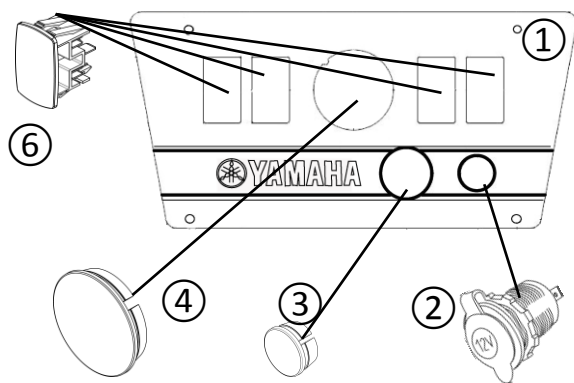


Fig. 2

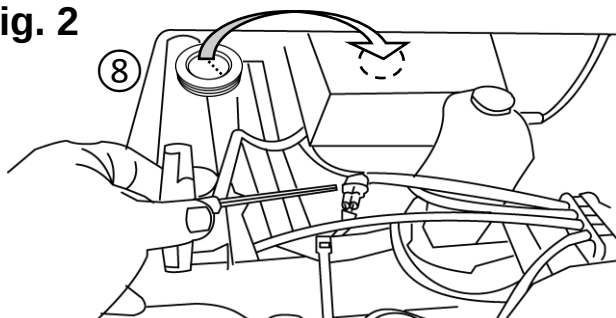

Unplug connector shown above and plug Wiring Harness ⑦ inline. Run wires with bullet connectors to dash

Fig. 3


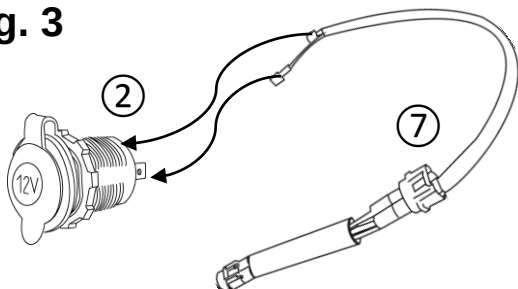


Fig. 4

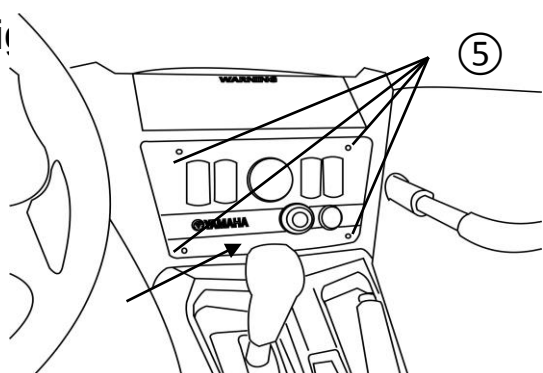

PREPARATION:

- Park the vehicle on a secure and level surface.
- Clean all mounting surfaces before beginning installation.

Note: The Dash Panel ① comes with parts ②, ③, ④, and ⑥ already installed (Fig. 1).

INSTALLATION:

1. Remove front fender. Drill out a 2" hole in the top of the dash box. The location is shown as a dotted line circle in Fig. 2.
2. Carefully slit the Grommet ⑧ to desired size to allow wires to pass through (Fig. 2).
3. Unplug the stock connector shown in Fig. 2.
4. Plug the Wire Harness ⑦ connector inline with the stock connector.
5. Run the Wire Harness ⑦ with two spade terminals back into the dash box through the grommet.
6. Connect the spade terminals from the Wire Harness ⑦ to the spade terminals on the 12V Receptacle ② (Fig. 3).
7. Position and center the Switch Panel ① over the dash box opening. Install the Switch Panel ① to the dash with the 4 SS Phillips head screws ⑤ (Fig. 4).

Note: Don't overtighten and strip out the mount holes.

8. Reinstall the front fender and any other panels you removed during installation. Refer to the Owners Manual and Service Manual for this vehicle for procedures and torque settings.

MAINTENANCE:

Periodically, check torque on all hardware. If loose hardware is found, re-torque to specification.

CARE AND CLEANING:

Clean dash panel with a clean soft cloth and mild soap and water. Dry with a clean soft cloth.

CUSTOMER SERVICE:

For further information see your Yamaha dealer.

ESTIMATED TIME TO INSTALL: 1.0 HRS